



OWNER'S MANUAL



SEGA ENTERPRISES, LTD.

CONTENTS

| 1. | HANDLING PRECAUTIONS | |
|----|--|--|
| | PREVENTION OF COUNTERFEITING AND CONVERSION | |
| | PRECAUTIONS CONCERNING THE PLACE OF INSTALLATION | |
| | I/O INSTRUCTIONS | |
| | OPTION SWITCH SETTINGS | |
| | OPERATION OF THE SERVICE SWITCH | |
| | EPROM LOCATION | |
| | PARTS LIST | |
| | SCHEMATIC DIAGRAM | |

SPECIFICATIONS -

INSTALLATION SPACE: 25.5 in. × 33 in.

HEIGHT : 76.5 in. POWER : 125 W

NOTE

· Descriptions herein contained may be subject to improvement changes without notice.

INTRODUCTION TO THE OWNER'S MANUAL

SEGA ENTERPRISES, LTD., supported by its high electronic technology of LSI, microprocessors, etc. and a wealth of experience, has for more than 30 years been supplying various innovative and popular game machines to the world market. This OWNER'S manual is intended to provide detailed comments together with all the necessary information covering the operation in general of electronic assemblies, electromechanicals, servicing control, spare parts, etc. as regards the ALIEN SYNDROME, a new SEGA product. The manual is intended for those who have knowledge of electricity and technical expertise especially in ICs, CRTs, microprocessors, etc. Carefully read so as to acquire sufficient knowledge before working on the machine. Should there be a malfunction, non-technical personnel should under no circumstances touch the interior system.

1. HANDLING PRECAUTIONS

When installing or inspecting, be very careful of the following points and pay attention to ensure that the player can enjoy the game safely.

- Be sure to turn the power off before working on the machine.
- To insert or pull out the plug quickly is dangerous.
- It is necessary to make sure that the power cord or the grounding wire is not exposed on the
 road, etc. in a manner so as to be dangerous. Make sure that grounding connections are made
 safely at the position where so specified.
- · Do not use any fuse that does not meet the specified rating.
- Make complete connections for the IC board and other connectors. Insufficient insertion is very dangerous.

2. PREVENTION OF COUNTERFEITING AND CONVERSION

LABELLING

To prevent counterfeits and conversions, the following labels are put on all the SEGA products. When handling such goods, be sure to confirm the labels. They are used to prevent illegal acts such as the unauthorized copying of the products and the printed circuit boards thereof or carrying on business by manufacturing similar merchandise or by converting, selling or using such products or printed circuit boards.

ORIGINAL SEAL

The following seal is put on the machines manufactured by SEGA.



LICENSE SEAL

The following seal is put on the kits, such as the printed circuit boards, of SEGA products.



COPYRIGHT NOTICE

This SEGA product has the copyright notice as follows:

© SEGA 1987


This signifies that this work was disclosed in 1987 and is the property of SEGA ENTERPRISES, LTD.

3. PRECAUTIONS CONCERNING THE PLACE OF INSTALLATION

The ALIEN SYNDROME is an indoor game machine. Absolutely do not install it outside. Even indoors, avoid installing it in places mentioned below so as to ensure proper usage:

- Places subject to rain or water leakage, or condensation due to humidity.
- In the proximity of an indoor swimming pool and/or shower.
- · Places subject to direct sunlight.
- Places subject to heat sources from heating units, etc., or hot air.
- · Vicinity of highly inflammable/volatile chemicals or hazardous matter.
- Sloped surfaces.
- · Vicinity of anti-disaster facilities such as fire exits and fire extinguishers.
- Places subject to any type of violent impact.
- · Dusty places.

4. I/O INSTRUCTIONS

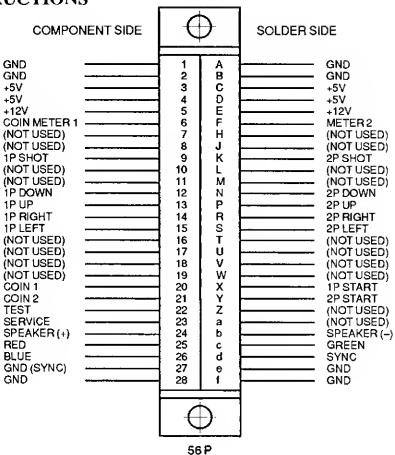


5. OPTION SWITCH SETTINGS

COIN/CREDIT OPTION SWITCH SETTING

DIP SWITCH #1


| OPT | ION | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|--|--|--|---------------------------------------|---------------------------------------|---------------------|--|---------------------------------------|--|--|
| 1 COIN 1 COIN 1 COIN 1 COIN 1 COIN 1 COIN 2 COINS 3 COINS 4 COINS 2 COINS | 1 CREDIT 2 CREDITS 3 CREDITS 4 CREDITS 5 CREDITS 6 CREDITS 1 CREDIT 1 CREDIT 1 CREDIT 1 CREDIT 3 CREDITS | OFF ON OFF ON OFF ON OFF ON | OFF OFF ON OFF OFF OFF | 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 | OFF OFF OFF OFF OFF | \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ | P P P P P P P P P P P P P P P P P P P | \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ | OFF OFF OFF OFF OFF OFF ON |
| 2 COINS 4 COINS 5 COINS 6 COINS | 1 CAEDIT 2 CAEDITS 3 CREDITS 4 CREDITS | OFF | ОИ | OFF | ON | OFF | ON | OFF | ON |
| 2 COINS 4 COINS | 1 CREDIT 3 CREDITS | ON | ОИ | OFF | ON | ON | ON | ÓFF | ON |
| 1 COIN 2 COINS 3 COINS 4 COINS 5 COINS | 1 CREDIT 2 CREDITS 3 CREDITS 4 CREDITS 6 CREDITS | OFF | OFF | 90 | ON | OFF | OFF | ON | ON |
| 1 COIN 2 COINS 3 COINS 4 COINS | 1 CREDIT 2 CREDITS 3 CREDITS 5 CREDITS | ON | OFF | 90 | ON | ON | OFF | ON | ON |
| 1 COIN 2 COINS | 1 CREDIT 3 CREDITS | OFF | ON | ON | ON | OFF | ON | ON | ON |
| 1 COIN | 1 CREDIT | ON | ON | ON | ON | ON | ON | ON | ON |



OPTION SWITCH SETTING


DIP SWITCH #2

| | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|-------------------------|--|-----|-----------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| NOT USED | | OFF | | | | | | | |
| ADVERTISE SOUND | ON OFF | | OFF ON | | | | | | |
| NUMBER OF PLAYERS | 3 MEN 2 MEN 4 MEN FREE | | | OFF ON OFF ON | OFF OFF ON ON | | | | |
| TIME LIMIT | 180 SEC. 170 SEC. 160 SEC. 150 SEC. | | | | | OFF ON OFF ON | OFF OFF ON ON | | |
| GAME DIFFICULTY | NORMAL EASY HARO HAROEST | | | | | - | | OFF ON OFF ON | OFF OFF ON ON |



6. OPERATION OF THE SERVICE SWITCH

• By opening the SERVICE DOOR, the following layout can be seen:

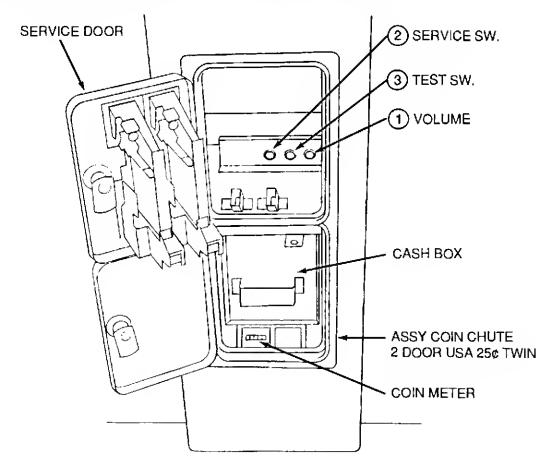

OPERATING INSTRUCTIONS

1 VOLUME

Adjusts speaker's volume.

2 SERVICE SW

The game can be played for servicing, etc. by increasing the credits without

registering on the coin meter.

3 TEST SW

Enters logic PCB test and bookkeeping modes.

7. EPROM LOCATION


EPR-10725

9

SPEECH

11


A11

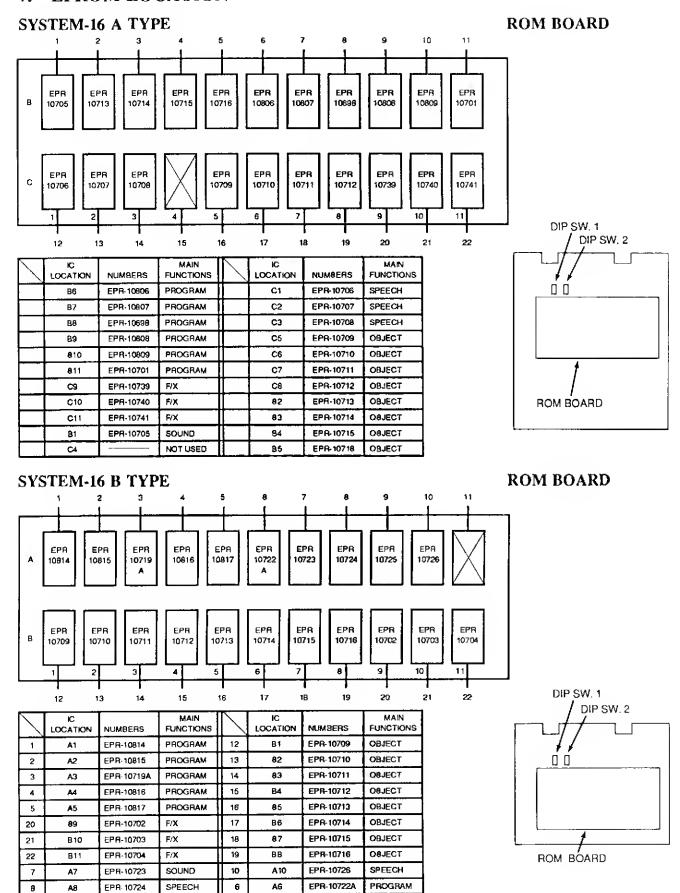


NOTUSED

8. PARTS LIST


| ITEM | PARTS NO. | QTY | DESCRIPTION |
|----------|-------------------------|-----|----------------------------|
| 1 | 1050-0064 | í | MAIN SW BRACKET |
| 2 | 1300-5001 | 1 | SPEAKER 8 OHM/10W |
| 3 | 1300-5001A | 1 | SPEAKER COVER |
| 4 | 2000-5090 | 1 | MONITOR RBG 19" |
| 5 | 2200-0000 | 1 | COIN DOOR ASSY |
| 6 . | 2501-0001 | 1 | CONTROL PANEL |
| 7 | 2501-0002 | 1 | PLEX BRACKET LOWER |
| 8 | 2501-0003 | 1 | PLEX BRACKET UPPER |
| 9 | 2501-0004 | 1 | SCREEN 9-1/2 × 3 |
| 10 | 2521-0001 | 1 | CARD BOARD BEZEL |
| 11 | 2531-0001 | i | C/P PLEX PLAY INST. |
| 12 | 2531-0002 | 1 | C/P PLEX SEGA LOGO |
| 13 | 2531-0003 | 1 | TOP ASSEMBLY ALIEN |
| 14 | 2751-0003 | 1 | GLASS 23-9/16 × 23-9/16 |
| 15 | 2800-0418 | | BUSHING STRAIN RELIEF |
| 16 | 3901-0001 | 1 | ASSY FLOUR FIXTURE DUAL |
| 17 | 3901-0002 | 1 | INCOND SOCKET |
| 18 | 3901-0002 3901-0002A | 1 | INCOND SOCKET |
| 19 | 3901-0002A | 1 | |
| 20 | 4000-5046 | 1 | PAL NUT |
| 21 | 4201-0001 | 1 | POWER SUPPLY 5V/7A |
| 22 | | - | OWNER'S MANUAL |
| | 4211-0001 | 1 | STICKER DANGER |
| 23 | 4211-0002 | 1 | STICKER MAIN SW ON/OFF |
| 24 | 4211-0003 | 1 | ADJUSTMENT INST |
| 25 | 4231-0001 | 1 | CONTROL PANEL OVERLAY |
| 26 | 4231-0002 | 1 | FRONT DESIGN PLATE |
| 27 | 4231-0003 | 1 | SIDE DECAL LEFT |
| 28 | 4231-0004 | 1 | SIDE DECAL RIGHT |
| 29 | 4750-0049 | 1 | RHEOSTAT 100 OHM/10W |
| 30 | 5090-0039 | 1 | SWITCH PB ON/OFF |
| 31 | 5090-5028 | 2 | SWITCH PB MOMENTARY |
| 32 | 5091-0001 | 2 | JOYSTICK ASSY 8WAY |
| 33 | 5091-0002 | 2 | PUSH BUTTON SW GREEN CLEAR |
| 34 | 5091-0003 | 2 | PUSH BUTTON SW RED CLEAR |
| 35 | 5140-0034 | 1 | FUSE 5A SLOWBLOW |
| 36 | 5140-0040 | 1 | FUSE 4A |
| 37 | 5140-0064 | 1 | FUSE HOLDER, 2P |
| 38 | 5600-5100 | 1 | TRANSFORMER 115/115 |
| 39 | 6000-007B | 1 | POWER CORD 8 FT. |
| 40 | 6010-0042 | 1 | KNOB 1/4" |
| 41 | 6010-0429 | 1 | LINE FILTER, RFI |
| 42 | 6011-0001 | 2 | FUSE COVER, PVC SINGLE |
| 43 | AL1-0001 | 1 | PACKAGING MATERIAL ALIEN |
| 44 | KR0-1721 | 1 | SWITCH BRACKET |
| 45 | MO0-1215Y | 1 | COVER |
| 46 | SGM0-2675 | 1 | POLYETHYLENE BAG |
| 47 | SGM0-3640 | 1 | POLYETHYLENE COVER |
| 48 | TB0-3003 | 1 | TV MASK |
| 49 | 117-5123 | 1 | ELEC. SPEC. PLATE |
| 50 | 421-5800-58 | 1 | ORIGINAL SEAL ALIEN |
| 50 | 421-6119 | 1 | FCC STICKER |
| 52 | 421-6120 | | |
| 52 53 | 421-6591 | 1 | STICKER SEGA USA |
| | | 1 | SERIAL NUMBER PLATE |
| 54 55 | 421-6796 | 1 | ADJ/IO ALIEN |
| 55 | 833-6308 | 1 | LOGIC PCB |

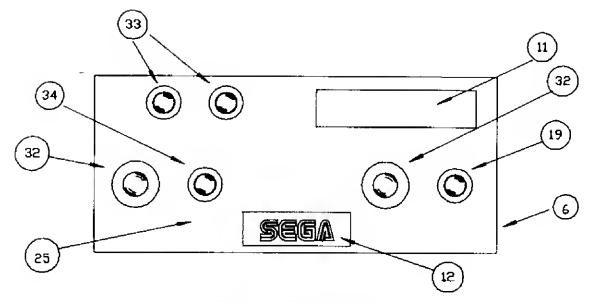

CONTROL PANEL ASSY

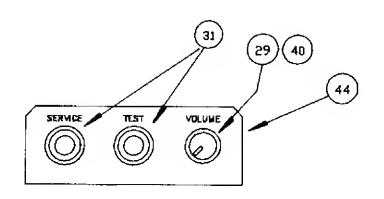

ASSY CONTROL UNIT



POWER SUPPLY ASSY

